



HORIZONTAL FLOW WORKSTATIONS

Project # Date:

Quote # Customer Ref #

STANDARD FEATURES

- Provides better than ISO-5 conditions
- HEPA Filter rated minimum 99.99% efficient at 0.3 microns
- Low energy costs
- Variable speed control to help increase HEPA filter life cycle

AVAILABLE OPTIONAL ACCESSORIES

BASE FRAMES

- No Base
- 30" sitting height
- 36" standing height
- Casters to form mobile base

OPTIONAL ACCESSORIES


- Stainless steel top & side panels
- Pass-thru Grommets on side panels
- LED Light Fixture

WORK SURFACES

- Phenolic Resin
- Stainless Steel

DUPLEX OUTLET

- Left side panel
- Right side panel

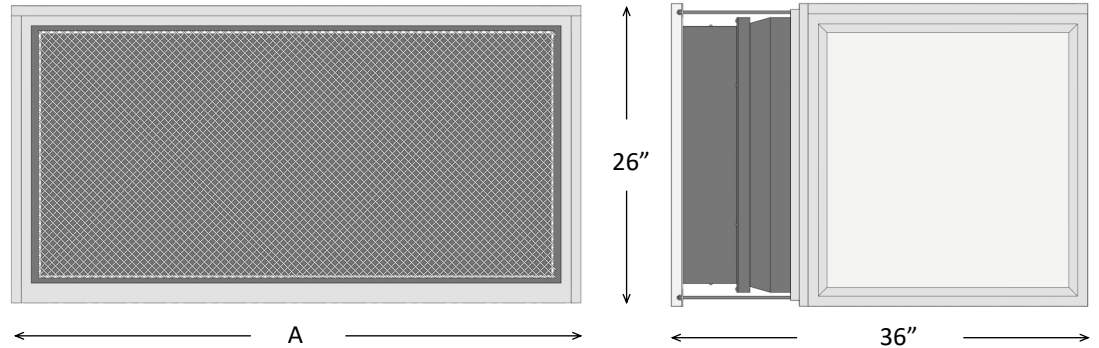

Qty	Model	Dimension A	Actual Dimensions W x D x H	Electrical Requirements
	HVF-2	24"	26" x 36" x 26"	2.22-amps, 115V, 50/50Hz
	HVF-3	36"	38" x 36" x 26"	4.44-amps, 115V, 50/50Hz
	HVF-4	48"	50" x 36" x 26"	4.44-amps, 115V, 50/50Hz
	HVF-5	60"	63" x 36" x 26"	6.66-amps, 115V, 50/50Hz
	HVF-6	72"	75" x 36" x 26"	8.88-amps, 115V, 50/50Hz

Customer Approval

Date: _____